

GENERAL


The RUKRA machineroom intercom is installed in the machineroom and makes it easy to connect to the elevator users in the elevator cabin. The system communicates through the connected RUKRA Elevator Phone so you don't need to install an additional voice module.

In the machineroom you connect a normal PSTN telephone on the RUKRA machineroom intercom. Once the handset is picked-up it is connected directly to the connected RUKRA Elevator Phone in the elevator cabin and there can be communicated with the elevator users.

After the conversation, you press the handset hook and the call is disconnected. There is no time-out present in the intercom, that is to say; if you do not disconnect the phone in the machineroom the intercom connection remains open and the elevator phone cannot dial out.

The machineroom intercom can also be used to program the RUKRA elevator Phone without the presence of a telephone line.

CONNECTIONS

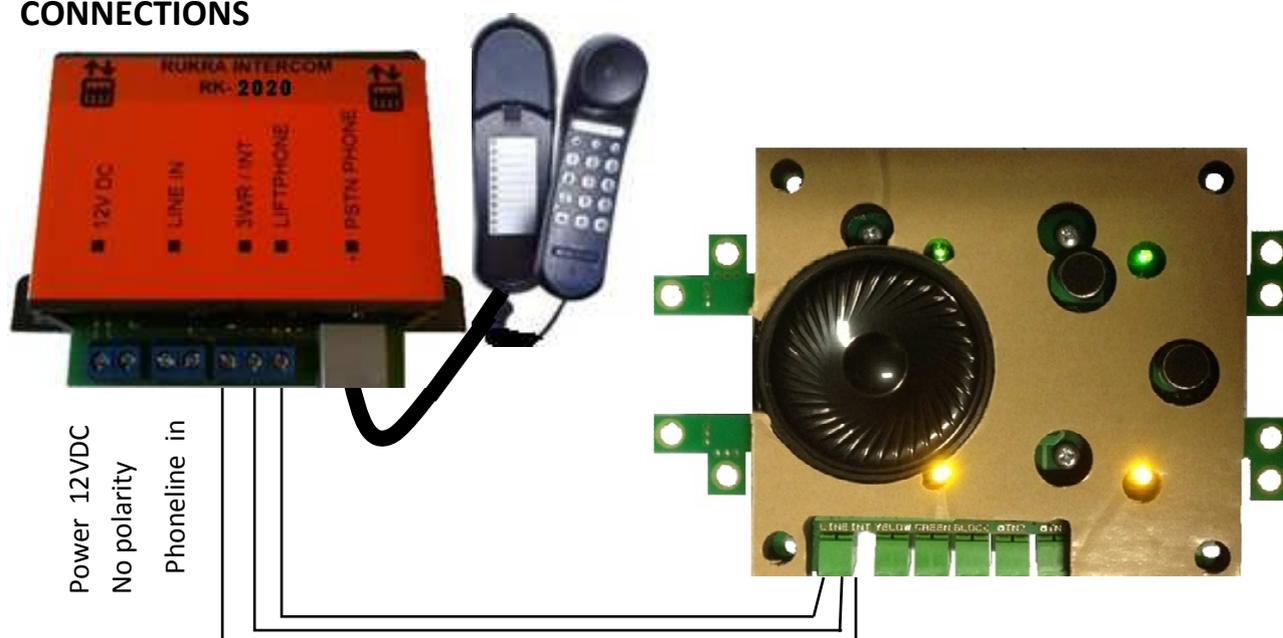

TECHNICAL

Power	: 12VDC
Environment temperature	: -20 ° - 85 ° C
Enclosure	: ABS Plastic
Sizes	: 65x25x60mm
CE	: The CE symbol indicates that the product complies with the European directives. On our website you can download the declaration of conformity.
Warranty	: 2 year Carry in
Delivery includes	: 1 x RUKRA machineroom intercom excl. Powersupply and Phone
Article numbers	: RUKRA Machineroom intercom: RK-2020 PSTN Phone : RK-1151 Emergency power supply : RK-5004